




SD 3060 TFR

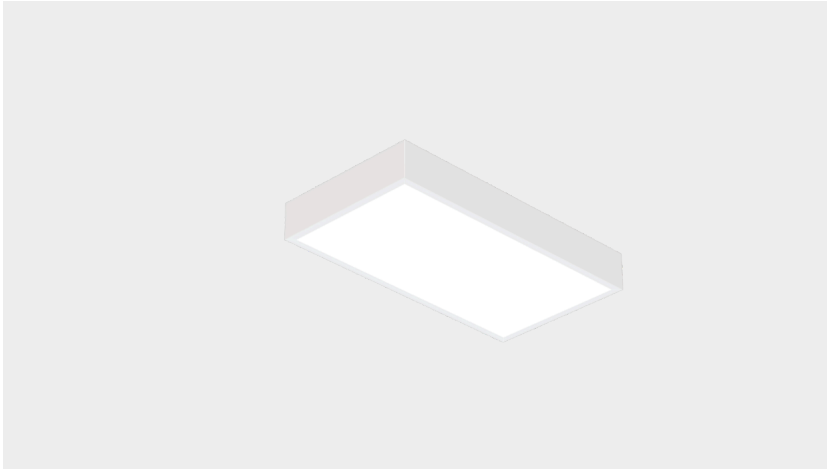

Housing

Sheet steel body with electrostatic powder coating.

Optics

Opal white polystyrene diffuser with lambertian light distribution.

Led

High-efficiency LED with CRI>80, achieving L90B50 \geq 50,000 hours of lifetime.

Driver

Constant current output LED driver with high efficiency and $Pf \geq 0.95$

Options

- * 1 or 3 hours emergency lighting kit
- * Dimming via DALI



Ral 9016 Ral 9006

Type Code	Power (w)	CCT (K)	Light Output (lm)	CRI	V/Hz	Weight (Kg)
SDTFR.3060.14.30	14	3000	1520	>80	220 - 240 / 50 - 60	2,35
SDTFR.3060.14.40	14	4000	1620	>80	220 - 240 / 50 - 60	2,35
SDTFR.3060.21.30	21	3000	2190	>80	220 - 240 / 50 - 60	2,35
SDTFR.3060.21.40	21	4000	2290	>80	220 - 240 / 50 - 60	2,35

