E 0360 OPC



HousingProduced through injection method, stroke and UV ray resistant Polycarbonate (PC).

OpticsProduced through injection method, strokeresistant, opal acrylic (PMMA) diffuser.

LedHigh-efficacy LED MODULE with CRI>80, achieving L90B50 ≥ 50,000 hours of lifetime.

GasketEPDM material monoblock gasket


Interior Housing High quality steel sheet with electrostatic powder coating, mounted with special clips.


DriverConstant current output LED driver with high efficiency and Pf≥0.95.

Ambient Temperature
-20 °C/+35 °C (With Emergency Lighting Unit : +5 °C/ +30 °C)

Options1 or 3 hours emergency lighting kit
Dimming via DALI
With sensor

Type Code	Power (w)	CCT (K)	Light Output (lm)	CRI	V/Hz	Weight (Kg)
EOPC.360.18.40	18	4000	2170	>80	220 - 240 / 50 - 60	2
EOPC.360.18.50	18	5000	2150	>80	220 - 240 / 50 - 60	2
EOPC.360.18.65	18	6500	2080	>80	220 - 240 / 50 - 60	2
EOPC.360.21.40	21	4000	2550	>80	220 - 240 / 50 - 60	2
EOPC.360.21.50	21	5000	2530	>80	220 - 240 / 50 - 60	2
EOPC.360.21.65	21	6500	2480	>80	220 - 240 / 50 - 60	2
EOPC.360.27.40	27	4000	3260	>80	220 - 240 / 50 - 60	2
EOPC.360.27.50	27	5000	3230	>80	220 - 240 / 50 - 60	2
EOPC.360.27.65	27	6500	3160	>80	220 - 240 / 50 - 60	2

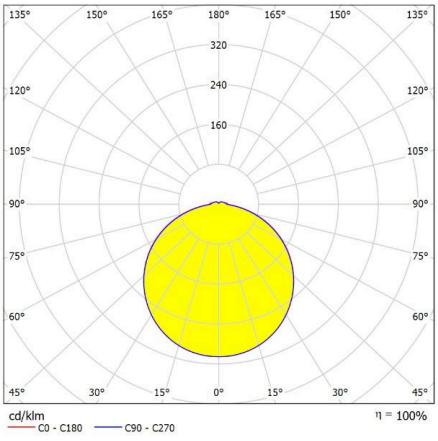

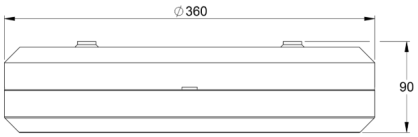
∅360
90