E 6060 GAC



Housing
Sheet steel body with electrostatic powder coating.

Optics
Opal white polystyrene diffuser with lambertian light distribution.

Led
High-efficacy LED MODULE with CRI>80, achieving L90B50 ≥ 50,000 hours of lifetime.

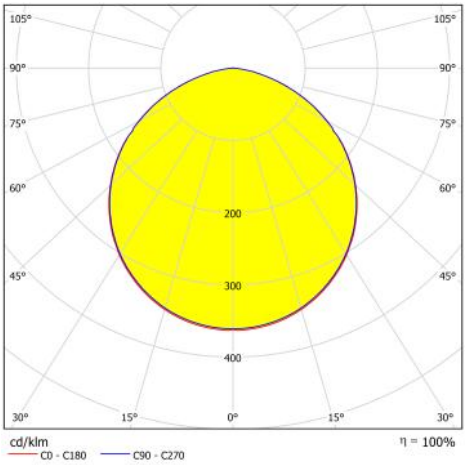
Glass
Tempered clear glass.


Driver
Constant current output LED driver with high efficiency and Pf≥0.95

Ambient Temperature
-20 °C/+35 °C (With Emergency Lighting Unit : +5 °C/ +30 °C)

Options1 or 3 hours emergency lighting kit
Dimming via DALI
IP65 can be made

Type Code	Power (w)	CCT (K)	Light Output (lm)	CRI	V/Hz	Weight (Kg)	Cut-out Size (mm)
EGAC. 6060.28.30.80	28	3000	2850	>80	220 - 240 / 50 - 60	8,9	580x580
EGAC. 6060.28.40.80	28	4000	3040	>80	220 - 240 / 50 - 60	8,9	580x580
EGAC. 6060.36.30.80	36	3000	3570	>80	220 - 240 / 50 - 60	8,9	580x580
EGAC. 6060.36.40.80	36	4000	3800	>80	220 - 240 / 50 - 60	8,9	580x580
EGAC. 6060.28.30.90	28	3000	2480	>90	220 - 240 / 50 - 60	8,9	580x580
EGAC. 6060.28.40.90	28	4000	2640	>90	220 - 240 / 50 - 60	8,9	580x580
EGAC. 6060.36.30.90	36	3000	3110	>90	220 - 240 / 50 - 60	8,9	580x580
EGAC. 6060.36.40.90	36	4000	3310	>90	220 - 240 / 50 - 60	8,9	580x580


105°
105°
90°
90°
75°
75°
60°
60°
45°
45°
200
300
400
30°
15°
0°
15°
30°
cd/klm
η = 100%
C0 - C180
C90 - C270


575 x 575
557
595
125
125
595