



SD 3368 CEL



Body

Sheet steel body with electrostatic powder coating.

Led

High-efficacy LED MODULE with CRI>80, achieving L90B50 \geq 50,000 hours of lifetime.

Driver

Constant current output LED driver with high efficiency and $Pf \geq 0.95$

Optics Acrylic (PMMA) optical lens + matte black or white color reflector (baffle)

Ambient Temperature -20 °C/+40 °C (With Emergency Lighting Unit : +5 °C/+30 °C)


Options

- * 1 or 3 hours emergency lighting kit
- * Dimming via DALI




Ral 9005 Double


| Type Code | Power (w) | CCT (K) | Light Output (lm) | CRI | V/Hz | Weight (Kg) | Beam Angle |
|-----------------------|-----------|---------|-------------------|-----|---------------------|-------------|------------|
| SDCEL.3368.80.W.88.40 | 88 | 4000 | 13120 | >80 | 220 - 240 / 50 - 60 | 7 | 80° |
| SDCEL.3368.80.W.88.50 | 88 | 5000 | 12880 | >80 | 220 - 240 / 50 - 60 | 7 | 80° |
| SDCEL.3368.OB.W.88.40 | 88 | 4000 | 11430 | >80 | 220 - 240 / 50 - 60 | 7 | 25+70° |
| SDCEL.3368.OB.W.88.50 | 88 | 5000 | 10940 | >80 | 220 - 240 / 50 - 60 | 7 | 25+70° |
| SDCEL.3368.80.B.88.40 | 88 | 4000 | 11010 | >80 | 220 - 240 / 50 - 60 | 7 | 80° |
| SDCEL.3368.80.B.88.50 | 88 | 5000 | 10690 | >80 | 220 - 240 / 50 - 60 | 7 | 80° |
| SDCEL.3368.OB.B.88.40 | 88 | 4000 | 8570 | >80 | 220 - 240 / 50 - 60 | 7 | 25+70° |
| SDCEL.3368.OB.B.88.50 | 88 | 5000 | 8390 | >80 | 220 - 240 / 50 - 60 | 7 | 25+70° |

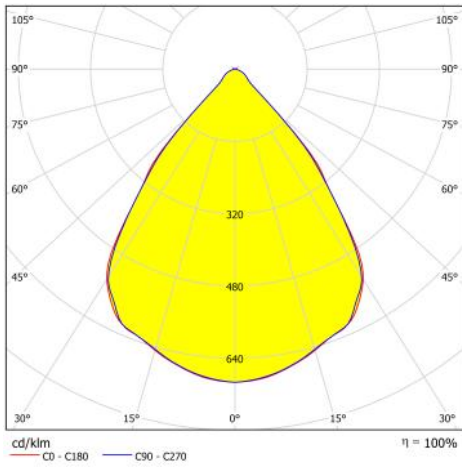


SDCEL.3368.80.B.88.40

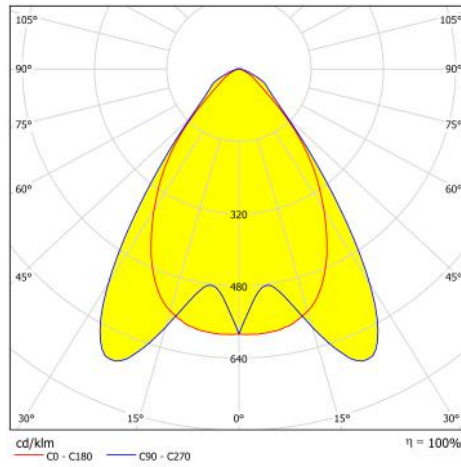

SDCEL.3368.OB.B.88.40

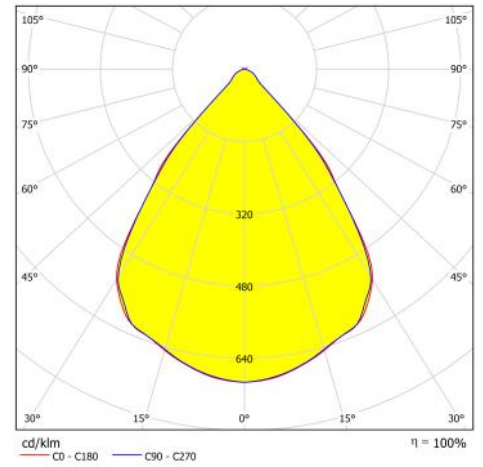

SDCEL.3368.80.W.88.40

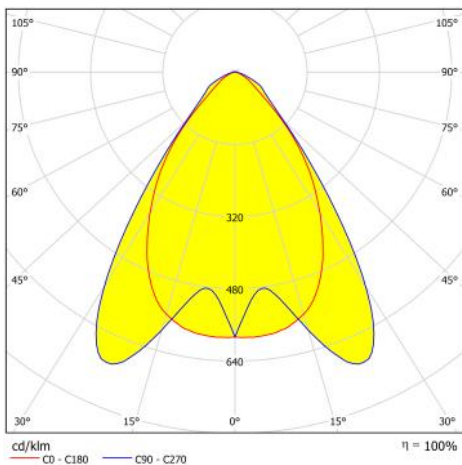

SDCEL.3368.OB.W.88.40

