




# CVU Series

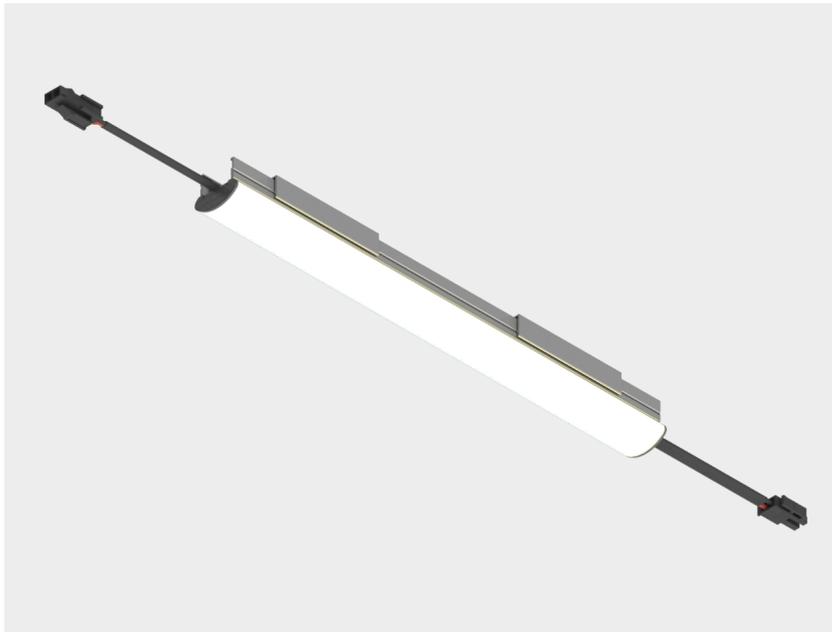

**Body**

Matte natural anodized, aluminum extrusion profile and steel mounting accessory, aluminum end caps.

**Diffuser**

Opal white polycarbonate diffuser providing homogeneous light distribution.

**LED**

Mid power led with 50.000 hours lifetime, high efficacy factor and color rendering.

**Driver**

24V external type. High efficiency LED driver with constant current output system.



\*Andz.

Type Code	Power (w)	CCT (K)	Light Output (lm)	CRI	V/Hz	Weight (Kg)	Cut-out Size (mm)
SD0250CVU.05.30	5	3000	320	>80	220 - 240 / 50 - 60	0,1	250
SD0500CVU.10.30	10	3000	640	80	220 - 240 / 50 - 60	0,2	500
SD1000CVU.20.30	20	3000	1250	>80	220 - 240 / 50 - 60	0,4	1000
SD1250CVU.25.30	25	3000	1250	>80	220 - 240 / 50 - 60	0,5	1250
SD1750CVU.35.30	35	3000	2250	>80	220 - 240 / 50 - 60	0,7	1750
SD2000CVU.42.30	42	3000	2550	>80	220 - 240 / 50 - 60	0,8	2000

