




# GIA

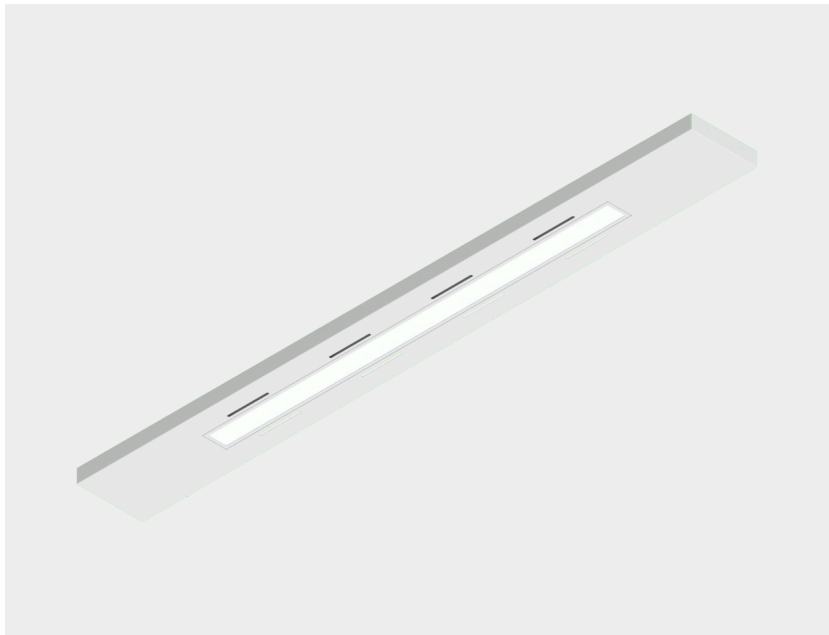

## Body

Electrostatic powder coated DKP sheet.

## Diffuser

Optical lens with UGR <19, anti-glare and homogeneous light distribution.

Opal whitesand diffuser with high light transmission.

## Led

Mid power with high efficacy factor and color rendering, L90B50  $\geq$ 50,000 hours.

## Driver

Constant current output, high efficiency, Pf  $\geq$ 0.95.

## Options

\* 1 or 3 hours emergency lighting module

\* Can be dimmed via DALI

\* Sensor can be added.



Ral 9016 Ral 9005 Ral 9006

Type Code	Power (w)	CCT (K)	Light Output (lm)	CRI	V/Hz	Weight (Kg)	L1 (mm)	L2 (mm)
G3017GIA.22.40	22	4000	3100	80	220 - 240 / 50 - 60	5,9	1720	297
G1217GIA.22.40	22	4000	3100	80	220 - 240 / 50 - 60	4,1	1720	115
G1917GIA.22.40	22	4000	3100	80	220 - 240 / 50 - 60	4,8	1720	185

