
# GIA

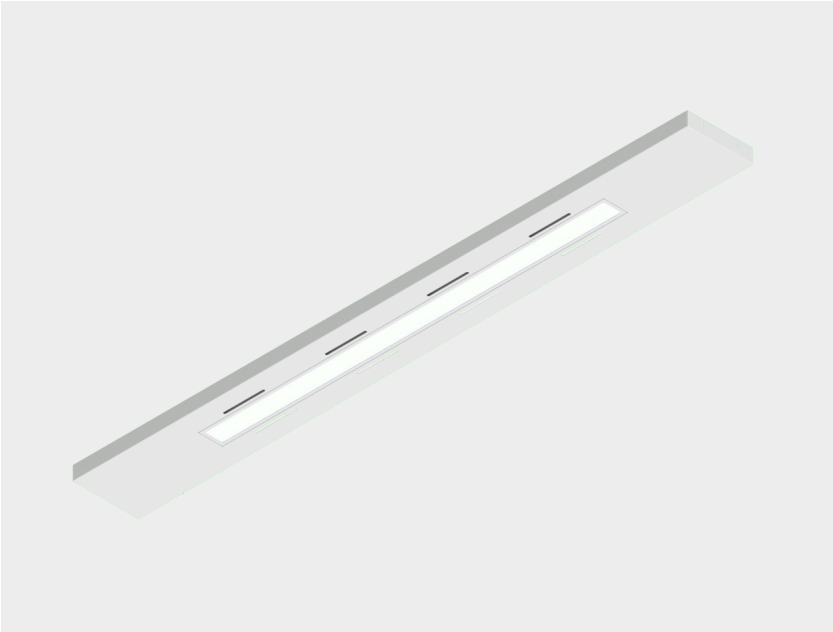

**Body**
Electrostatic powder coated DKP sheet.

**Diffuser**
Optical lens with UGR <19, anti-glare and homogeneous light distribution.

Opal whitesand diffuser with high light transmission.

**Led**
Mid power with high efficacy factor and color rendering, L90B50 ≥50,000 hours.

**Driver**
Constant current output, high efficiency, Pf ≥0.95.

**Options**


* 1 or 3 hours emergency lighting module

* Can be dimmed via DALI

* Sensor can be added.

Ral 9016 Ral 9005 Ral 9006

| Type Code | Power (w) | CCT (K) | Light Output (lm) | CRI | V/Hz | Weight (Kg) | L1 (mm) | L2 (mm) |
|---|---|---|---|---|---|---|---|---|
| G3017GIA.22.40 | 22 | 4000 | 3100 | 80 | 220 - 240 / 50 - 60 | 5,9 | 1720 | 297 |
| G1217GIA.22.40 | 22 | 4000 | 3100 | 80 | 220 - 240 / 50 - 60 | 4,1 | 1720 | 115 |
| G1917GIA.22.40 | 22 | 4000 | 3100 | 80 | 220 - 240 / 50 - 60 | 4,8 | 1720 | 185 |

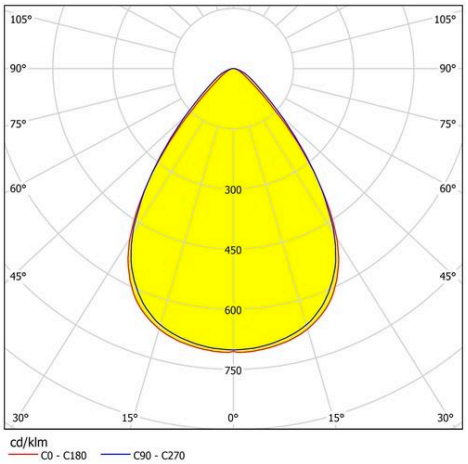


L1
L2