
# G 20120 YGT

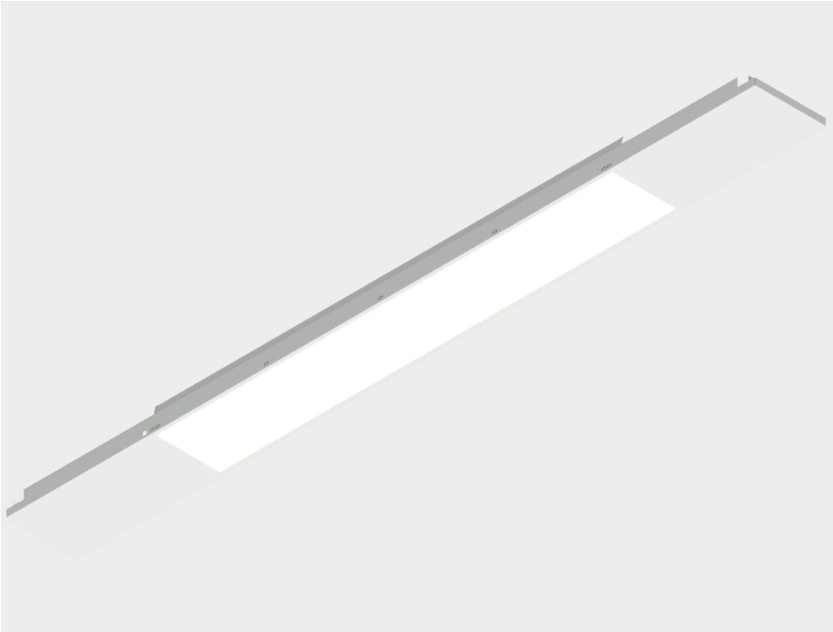

**Body**
Electrostatic powder coated DKP sheet.

**Diffuser**
Opal white prismatic diffuser with homogeneous light distribution, high light transmission.

**Led**
Mid power with high efficacy factor and color rendering, L90B50 50,000 hours.

**Driver**
Constant current output, high efficiency, Pf ≥0.95.

**Option**
* 1 or 3 hours emergency lighting module.
* Can be dimmed via DALI.

Ral 9016 Ral 9005 Ral 9006

| Type Code | Power (w) | CCT (K) | Light Output (lm) | CRI | V/Hz | Weight (Kg) | L1 (mm) | L2 (mm) |
|---|---|---|---|---|---|---|---|---|
| G20120YGT.28.40 | 28 | 4000 | 3400 | 80 | 220 - 240 / 50 - 60 | 5,3 | 2100 | 200 |

