




# G 20120 YGT

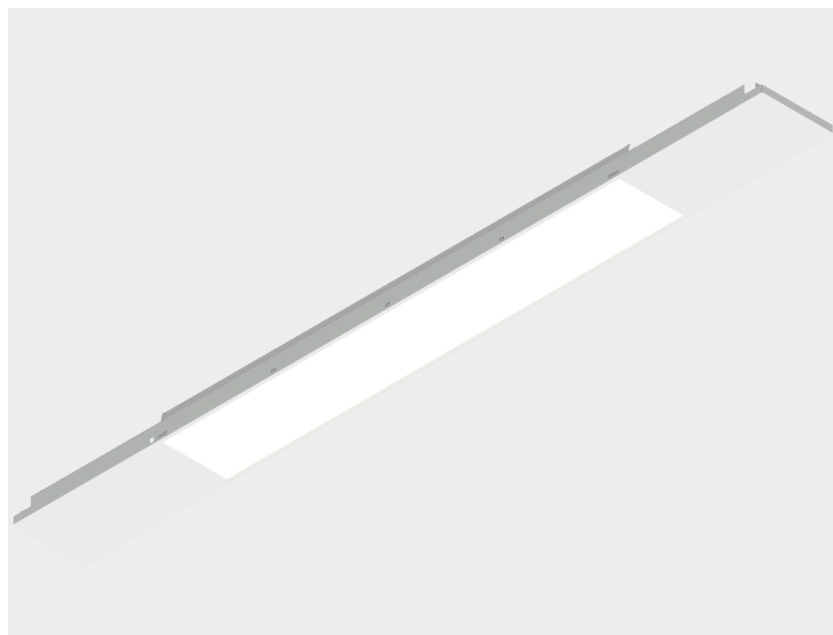

## Body

Electrostatic powder coated DKP sheet.

## Diffuser

Opal white prismatic diffuser with homogeneous light distribution, high light transmission.

## Led

Mid power with high efficacy factor and color rendering, L90B50 50,000 hours.

## Driver

Constant current output, high efficiency,  $Pf \geq 0.95$ .

## Option

\* 1 or 3 hours emergency lighting module.

\* Can be dimmed via DALI.



Ral 9016 Ral 9005 Ral 9006

Type Code	Power (w)	CCT (K)	Light Output (lm)	CRI	V/Hz	Weight (Kg)	L1 (mm)	L2 (mm)
G20120YGT.28.40	28	4000	3400	80	220 - 240 / 50 - 60	5,3	2100	200

