Stella Duo / Opal



Housing
Aluminum extrusion profile and steel mounting accessories

Diffuser
Opal diffusing polycarbonate lens with lambertian light distribution

LED
High-efficacy mid power LED with CRI>80, achieving L90B50 ≥ 50,000 hours of lifetime

Driver
Constant current output LED driver with high efficiency and Pf≥0.90

Operating Temperature Range
0 °C/+35 °C

Option
Dimming via DALI

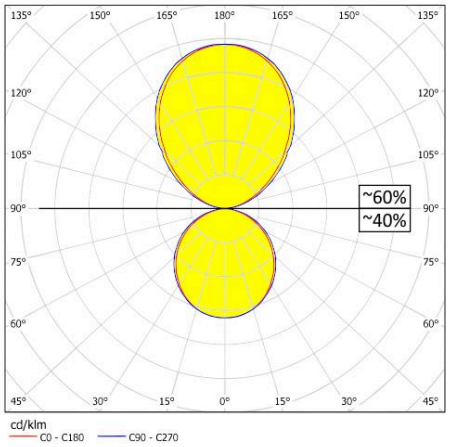
LL Low Lumen
HL High Lumen

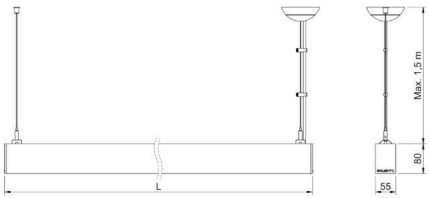
*Matte natural anodized housing, finising G90 custom color.

Ral 9016 Ral 9005 *Andz.

Type Code	Power (w)	CCT (K)	Light Output (lm)	CRI	V/Hz	L (mm)	Direct	Indirect	Lumen Variations
SSTI.1140.37.40	37	4000	4480	80	220 - 240 / 50 - 60	1140	45%	55%	LL
SSTI.1140.37.30	37	3000	4260	80	220 - 240 / 50 - 60	1140	45%	55%	LL
SSTI.1140.52.40	52	4000	6120	80	220 - 240 / 50 - 60	1140	45%	55%	HL
SSTI.1140.52.30	52	3000	5810	80	220 - 240 / 50 - 60	1140	45%	55%	HL
SSTI.1420.49.40	49	4000	5570	80	220 - 240 / 50 - 60	1420	45%	55%	LL
SSTI.1420.49.30	49	3000	5290	80	220 - 240 / 50 - 60	1420	45%	55%	LL
SSTI.1420.65.40	65	4000	7730	80	220 - 240 / 50 - 60	1420	45%	55%	HL
SSTI.1420.65.30	65	3000	7340	80	220 - 240 / 50 - 60	1420	45%	55%	HL
SSTI.1700.56.40	56	4000	6680	80	220 - 240 / 50 - 60	1700	45%	55%	LL
SSTI.1700.56.30	56	3000	6350	80	220 - 240 / 50 - 60	1700	45%	55%	LL
SSTI.1700.78.40	78	4000	8970	80	220 - 240 / 50 - 60	1700	45%	55%	HL
SSTI.1700.78.30	78	3000	8520	80	220 - 240 / 50 - 60	1700	45%	55%	HL

Type Code	Power (w)	CCT (K)	Light Output (lm)	CRI	V/Hz	L (mm)	Direct	Indirect	Lumen Variations
SSTI.1980.70.40	70	4000	7790	80	220 - 240 / 50 - 60	1980	45%	55%	LL
SSTI.1980.70.30	70	3000	7400	80	220 - 240 / 50 - 60	1980	45%	55%	LL
SSTI.1980.95.40	95	4000	10520	80	220 - 240 / 50 - 60	1980	45%	55%	HL
SSTI.1980.95.30	95	3000	9990	80	220 - 240 / 50 - 60	1980	45%	55%	HL
SSTI.2260.80.40	80	4000	8880	80	220 - 240 / 50 - 60	2260	45%	55%	LL
SSTI.2260.80.30	80	3000	8440	80	220 - 240 / 50 - 60	2260	45%	55%	LL
SSTI.2260.109.40	109	4000	11970	80	220 - 240 / 50 - 60	2260	45%	55%	HL
SSTI.2260.109.30	109	3000	11370	80	220 - 240 / 50 - 60	2260	45%	55%	HL
SSTI.2540.90.40	90	4000	10010	80	220 - 240 / 50 - 60	2540	45%	55%	LL
SSTI.2540.90.30	90	3000	9510	80	220 - 240 / 50 - 60	2540	45%	55%	LL
SSTI.2540.122.40	122	4000	13510	80	220 - 240 / 50 - 60	2540	45%	55%	HL
SSTI.2540.122.30	122	3000	12840	80	220 - 240 / 50 - 60	2540	45%	55%	HL
SSTI.2820.100.40	100	4000	11100	80	220 - 240 / 50 - 60	2820	45%	55%	LL
SSTI.2820.100.30	100	3000	10550	80	220 - 240 / 50 - 60	2820	45%	55%	LL
SSTI.2820.136.40	136	4000	14950	80	220 - 240 / 50 - 60	2820	45%	55%	HL
SSTI.2820.136.30	136	4000	14210	80	220 - 240 / 50 - 60	2820	45%	55%	HL


135°
150°
165°
180°
165°
150°
135°
120°
120°
105°
105°
90°
90°
75°
75°
60°
60°
45°
30°
15°
0°
15°
30°
45°
~60%
~40%
cd/klm
C0 - C180
C90 - C270


L
Max. 1.5 m
80
55