

# SP 0600 AYN



**Housing** Matt natural anodized, aluminum extrusion profile and stainless steel mounting accessories with plastic ceiling cup.

### Optics


Opal, white, diffusing polycarbonate lens with lambertian light distribution.

**Led** High-efficacy mid power LED with CRI>80, achieving L90B50  $\geq$  50,000 hours of lifetime.


**Driver** Constant current output LED driver with high efficiency and  $Pf \geq 0.95$

**Color** Matte natural anodized  
White (RAL9016)

Type Code	Power (w)	CCT (K)	Light Output (lm)	CRI	V/Hz	Weight (Kg)	L (mm)
SPAYN.600.14.30	14	3000	1250	>80	220 - 240 / 50 - 60	0,9	620
SPAYN.600.14.40	14	4000	1320	>80	220 - 240 / 50 - 60	0,9	620
SPAYN.900.20.30	20	3000	1870	>80	220 - 240 / 50 - 60	1,2	900
SPAYN.900.20.40	20	4000	1990	>80	220 - 240 / 50 - 60	1,2	900
SPAYN.1200.27.30	27	3000	2490	>80	220 - 240 / 50 - 60	1,5	1180
SPAYN.1200.27.40	27	4000	2650	>80	220 - 240 / 50 - 60	1,5	1180
SPAYN.1500.34.30	34	3000	3110	>80	220 - 240 / 50 - 60	1,7	1460
SPAYN.1500.34.40	34	4000	3310	>80	220 - 240 / 50 - 60	1,7	1460

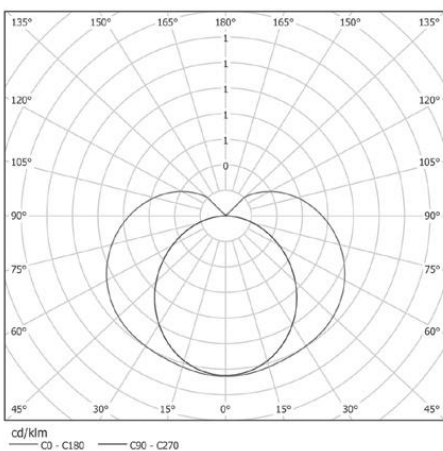

SP 0600 AYN (1)

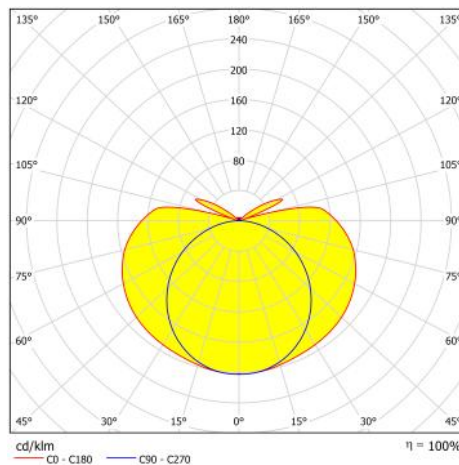

SP 1500 AYN

