




# B 0315 HDC

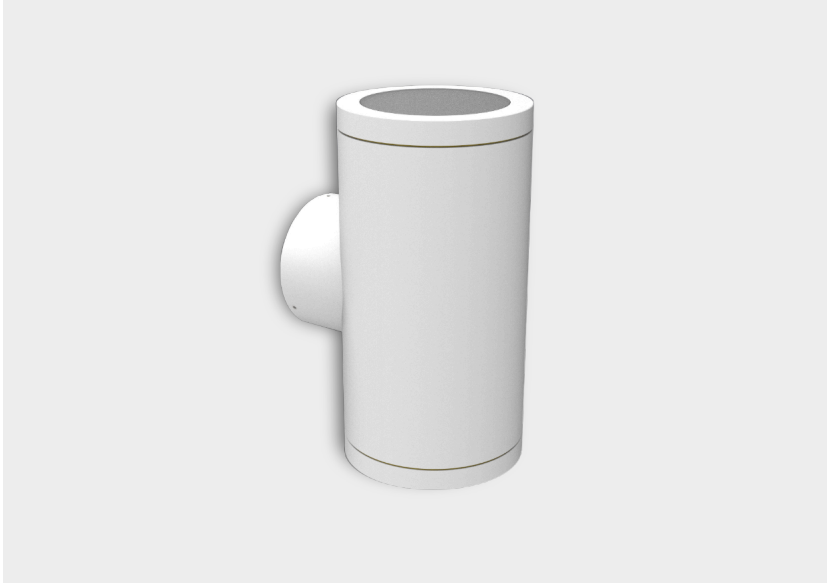

## Housing

Ø150mm galvanized, anti-corrosion electrostatic powder painted steel body.

## Led

High efficacy PAR30 LED lamp with integrated driver and heatsink. Connected directly to the mains. Achieves 40,000 hours of lifetime and CRI > 80.

## Optics

Opal tempered glass.

## Lamp Base

Porcelain E-27

**Çalışma Sıcaklığı Aralığı**  
-20 °C/+40 °C



| Tip Kodu       | Güç (w) | CCT (K) | Işık Akısı (lm) | CRI | V/Hz                | Ağırlık (Kg) |
|----------------|---------|---------|-----------------|-----|---------------------|--------------|
| BHDC.315.13.27 | 15      | 3000    | 1300            | >80 | 220 - 240 / 50 - 60 | 2            |

