



# STARK

**Housing** Aluminium injection with electrostatic powder coating and air valve (ventile), monoblok silikon gasket

**Optics** Special design, clear, acrylic (PMMA) optic lens

**Glass** 4mm clear tempered glass

**LED** High-power LED with high efficacy

**Driver** Constant current driver with high efficiency

**Ambient Temperature**  
-40 °C/+50 °C

#### Impact Resistance

Glass : IK08


Body : IK10




ARL-G90 Ral 9005

| Type Code          | Power (w) | CCT (K) | Light Output (lm) | CRI | V/Hz                | Weight (Kg) |
|--------------------|-----------|---------|-------------------|-----|---------------------|-------------|
| BSTA.550.48.40.L1  | 48        | 4000    | 7710              | >70 | 220 - 240 / 50 - 60 | 8,5         |
| BSTA.550.48.40.L2  | 48        | 4000    | 7750              | >70 | 220 - 240 / 50 - 60 | 8,5         |
| BSTA.550.48.40.L3  | 48        | 4000    | 7780              | >70 | 220 - 240 / 50 - 60 | 8,5         |
| BSTA.550.48.40.L4  | 48        | 4000    | 7850              | >70 | 220 - 240 / 50 - 60 | 8,5         |
| BSTA.550.58.40.L1  | 58        | 4000    | 8980              | >70 | 220 - 240 / 50 - 60 | 8,5         |
| BSTA.550.58.40.L2  | 58        | 4000    | 9000              | >70 | 220 - 240 / 50 - 60 | 8,5         |
| BSTA.550.58.40.L3  | 58        | 4000    | 9150              | >70 | 220 - 240 / 50 - 60 | 8,5         |
| BSTA.550.58.40.L4  | 58        | 4000    | 9180              | >70 | 220 - 240 / 50 - 60 | 8,5         |
| BSTA.550.69.40.L1  | 69        | 4000    | 10360             | >70 | 220 - 240 / 50 - 60 | 8,5         |
| BSTA.550.69.40.L2  | 69        | 4000    | 10680             | >70 | 220 - 240 / 50 - 60 | 8,5         |
| BSTA.550.69.40.L3  | 69        | 4000    | 10580             | >70 | 220 - 240 / 50 - 60 | 8,5         |
| BSTA.550.69.40.L4  | 69        | 4000    | 10460             | >70 | 220 - 240 / 50 - 60 | 8,5         |
| BSTA.550.105.40.L1 | 105       | 4000    | 15970             | >70 | 220 - 240 / 50 - 60 | 8,5         |
| BSTA.550.105.40.L2 | 105       | 4000    | 15980             | >70 | 220 - 240 / 50 - 60 | 8,5         |
| BSTA.550.105.40.L3 | 105       | 4000    | 16010             | >70 | 220 - 240 / 50 - 60 | 8,5         |
| BSTA.550.105.40.L4 | 105       | 4000    | 15960             | >70 | 220 - 240 / 50 - 60 | 8,5         |
| BSTA.550.140.40.L1 | 140       | 4000    | 19730             | >70 | 220 - 240 / 50 - 60 | 9           |
| BSTA.550.140.40.L2 | 140       | 4000    | 19560             | >70 | 220 - 240 / 50 - 60 | 9           |


| Type Code              | Power (w) | CCT (K) | Light Output (lm) | CRI | V/Hz                | Weight (Kg) |
|------------------------|-----------|---------|-------------------|-----|---------------------|-------------|
| BSTA.<br>550.140.40.L3 | 140       | 4000    | 19750             | >70 | 220 - 240 / 50 - 60 | 9           |
| BSTA.<br>550.140.40.L4 | 140       | 4000    | 19440             | >70 | 220 - 240 / 50 - 60 | 9           |

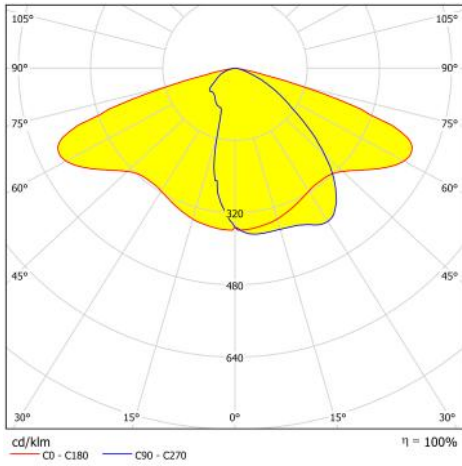


BSTA.550.140.40.L1

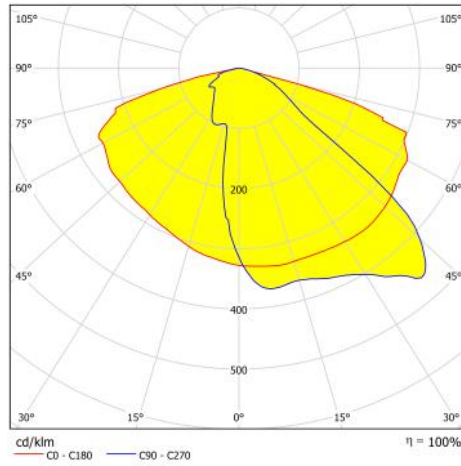

BSTA.550.140.40.L2

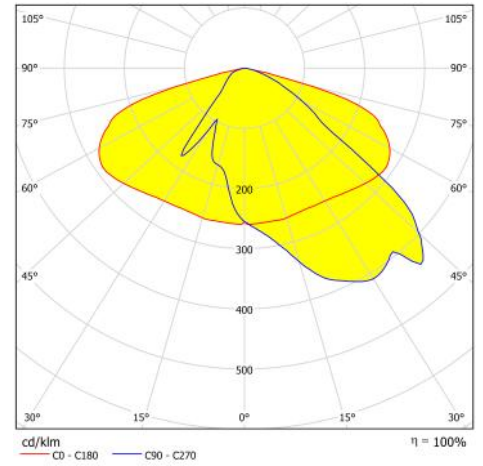

BSTA.550.140.40.L3

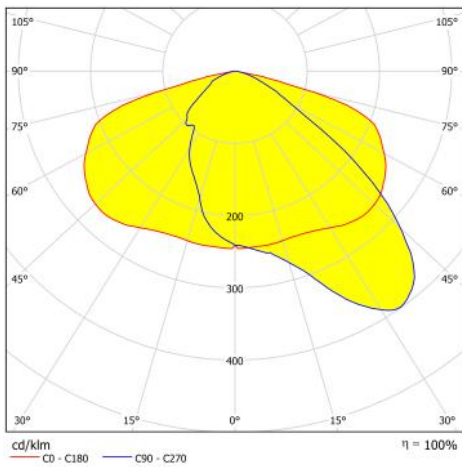

BSTA.550.140.40.L4

