



STARK

Housing Aluminium injection with electrostatic powder coating and air valve (ventile), monoblok silikon gasket

Optics Special design, clear, acrylic (PMMA) optic lens

Glass 4mm clear tempered glass

LED High-power LED with high efficacy

Driver Constant current driver with high efficiency

Ambient Temperature

-40 °C/+50 °C

Impact Resistance

Glass : IK08


Body : IK10




ARL-G90 Ral 9005

Type Code	Power (w)	CCT (K)	Light Output (lm)	CRI	V/Hz	Weight (Kg)
BSTA.550.48.40.L1	48	4000	7710	>70	220 - 240 / 50 - 60	8,5
BSTA.550.48.40.L2	48	4000	7750	>70	220 - 240 / 50 - 60	8,5
BSTA.550.48.40.L3	48	4000	7780	>70	220 - 240 / 50 - 60	8,5
BSTA.550.48.40.L4	48	4000	7850	>70	220 - 240 / 50 - 60	8,5
BSTA.550.58.40.L1	58	4000	8980	>70	220 - 240 / 50 - 60	8,5
BSTA.550.58.40.L2	58	4000	9000	>70	220 - 240 / 50 - 60	8,5
BSTA.550.58.40.L3	58	4000	9150	>70	220 - 240 / 50 - 60	8,5
BSTA.550.58.40.L4	58	4000	9180	>70	220 - 240 / 50 - 60	8,5
BSTA.550.69.40.L1	69	4000	10360	>70	220 - 240 / 50 - 60	8,5
BSTA.550.69.40.L2	69	4000	10680	>70	220 - 240 / 50 - 60	8,5
BSTA.550.69.40.L3	69	4000	10580	>70	220 - 240 / 50 - 60	8,5
BSTA.550.69.40.L4	69	4000	10460	>70	220 - 240 / 50 - 60	8,5
BSTA.550.105.40.L1	105	4000	15970	>70	220 - 240 / 50 - 60	8,5
BSTA.550.105.40.L2	105	4000	15980	>70	220 - 240 / 50 - 60	8,5
BSTA.550.105.40.L3	105	4000	16010	>70	220 - 240 / 50 - 60	8,5
BSTA.550.105.40.L4	105	4000	15960	>70	220 - 240 / 50 - 60	8,5
BSTA.550.140.40.L1	140	4000	19730	>70	220 - 240 / 50 - 60	9
BSTA.550.140.40.L2	140	4000	19560	>70	220 - 240 / 50 - 60	9


Type Code	Power (w)	CCT (K)	Light Output (lm)	CRI	V/Hz	Weight (Kg)
BSTA. 550.140.40.L3	140	4000	19750	>70	220 - 240 / 50 - 60	9
BSTA. 550.140.40.L4	140	4000	19440	>70	220 - 240 / 50 - 60	9

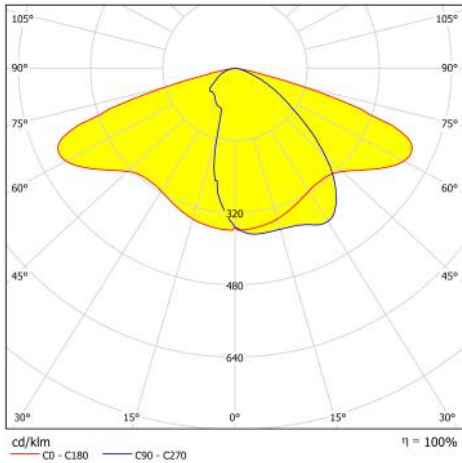


BSTA.550.140.40.L1

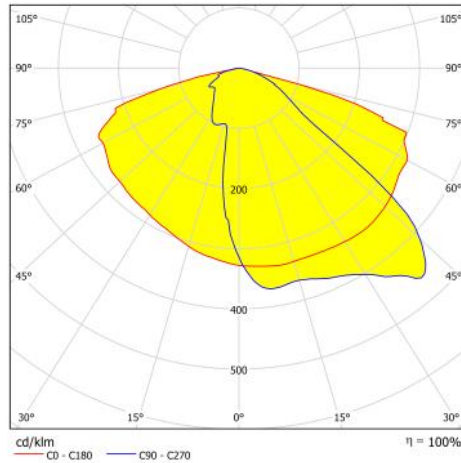

BSTA.550.140.40.L2

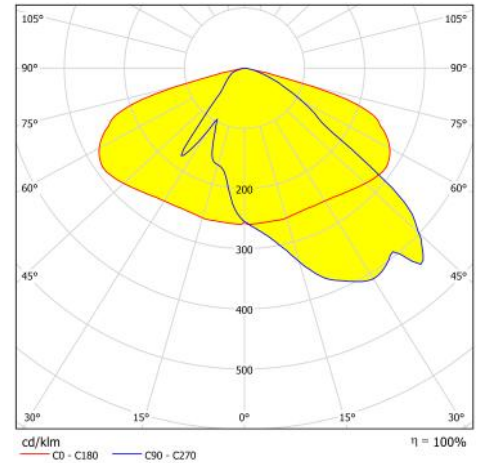

BSTA.550.140.40.L3

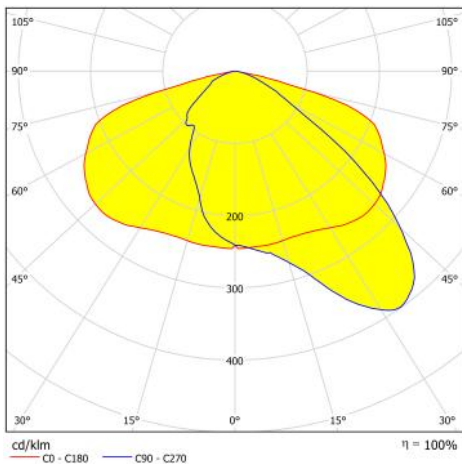

BSTA.550.140.40.L4

