STARK



HousingAluminium injection with electrostatic powder coating and air valve (ventile), monoblok silikon gasket

OpticsSpecial design, clear, acrylic (PMMA) optic lens

Glass4mm clear tempered glass

LEDHigh-power LED with high efficacy


DriverConstant current driver with high efficiency

Ambient Temperature
-40 °C/+50 °C


Impact Resistance
Glass : IK08
Body : IK10

ARL-G90 Ral 9005


Type Code	Power (w)	CCT (K)	Light Output (lm)	CRI	V/Hz	Weight (Kg)
BSTA. 550.105.40.L1	105	4000	15970	>70	220 - 240 / 50 - 60	8,5
BSTA. 550.105.40.L2	105	4000	15980	>70	220 - 240 / 50 - 60	8,5
BSTA. 550.105.40.L3	105	4000	16010	>70	220 - 240 / 50 - 60	8,5
BSTA. 550.105.40.L4	105	4000	15960	>70	220 - 240 / 50 - 60	8,5
BSTA. 550.140.40.L1	140	4000	19730	>70	220 - 240 / 50 - 60	9
BSTA. 550.140.40.L2	140	4000	19560	>70	220 - 240 / 50 - 60	9
BSTA. 550.140.40.L3	140	4000	19750	>70	220 - 240 / 50 - 60	9
BSTA. 550.140.40.L4	140	4000	19440	>70	220 - 240 / 50 - 60	9

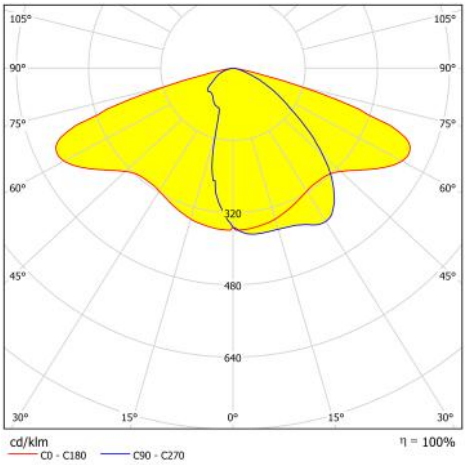


BSTA.550.140.40.L1

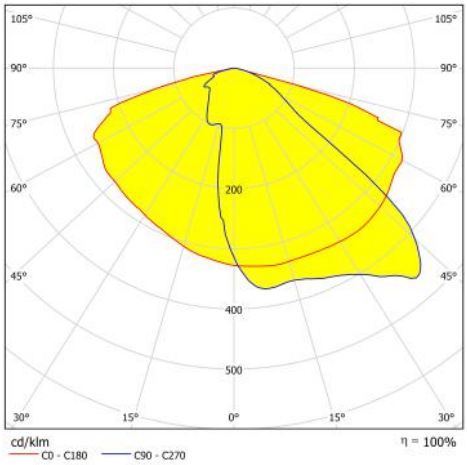

BSTA.550.140.40.L2

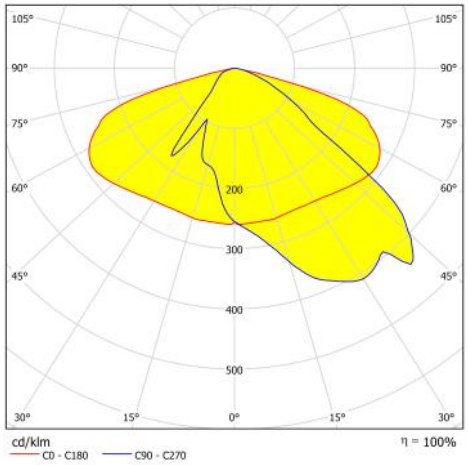

BSTA.550.140.40.L3

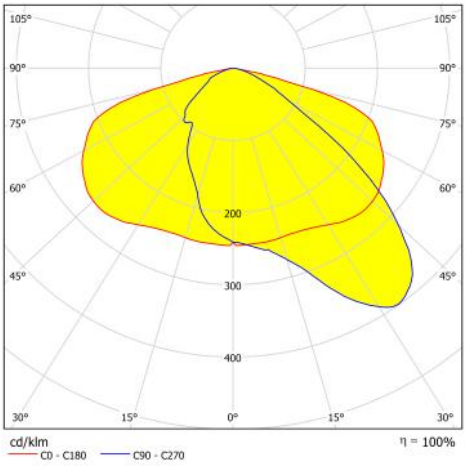

BSTA.550.140.40.L4

