



STARK

Housing Aluminium injection with electrostatic powder coating and air valve (ventile), monoblok silikon gasket

Optics Special design, clear, acrylic (PMMA) optic lens

Glass 4mm clear tempered glass

LED High-power LED with high efficacy

Driver Constant current driver with high efficiency

Ambient Temperature

-40 °C/+50 °C

Impact Resistance


Glass : IK08

Body : IK10




ARL-G90 Ral 9005


| Type Code | Power (w) | CCT (K) | Light Output (lm) | CRI | V/Hz | Weight (Kg) |
|------------------------|-----------|---------|-------------------|-----|---------------------|-------------|
| BSTA. 550.105.40.L1 | 105 | 4000 | 15970 | >70 | 220 - 240 / 50 - 60 | 8,5 |
| BSTA. 550.105.40.L2 | 105 | 4000 | 15980 | >70 | 220 - 240 / 50 - 60 | 8,5 |
| BSTA. 550.105.40.L3 | 105 | 4000 | 16010 | >70 | 220 - 240 / 50 - 60 | 8,5 |
| BSTA. 550.105.40.L4 | 105 | 4000 | 15960 | >70 | 220 - 240 / 50 - 60 | 8,5 |
| BSTA. 550.140.40.L1 | 140 | 4000 | 19730 | >70 | 220 - 240 / 50 - 60 | 9 |
| BSTA. 550.140.40.L2 | 140 | 4000 | 19560 | >70 | 220 - 240 / 50 - 60 | 9 |
| BSTA. 550.140.40.L3 | 140 | 4000 | 19750 | >70 | 220 - 240 / 50 - 60 | 9 |
| BSTA. 550.140.40.L4 | 140 | 4000 | 19440 | >70 | 220 - 240 / 50 - 60 | 9 |

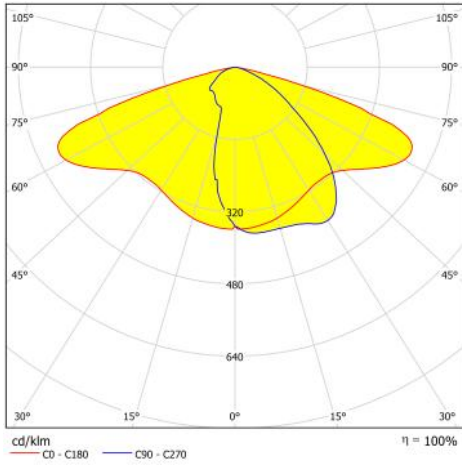


BSTA.550.140.40.L1

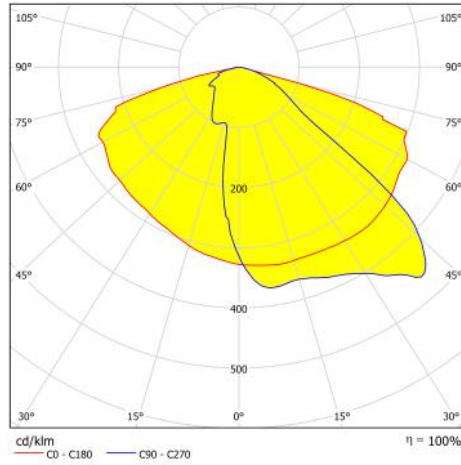

BSTA.550.140.40.L2

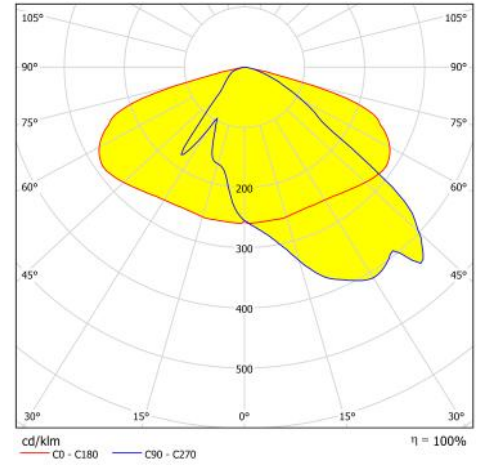

BSTA.550.140.40.L3

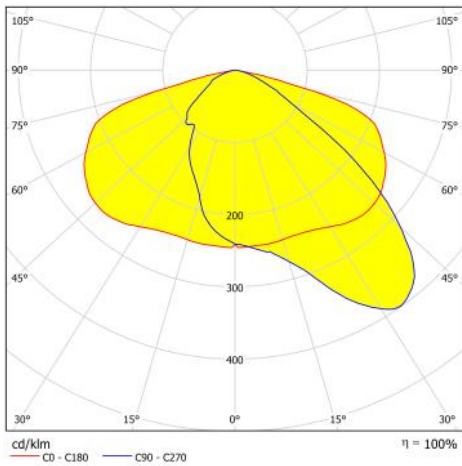

BSTA.550.140.40.L4

