



# STARK

**Housing** Aluminium injection with electrostatic powder coating and air valve (ventile), monoblok silikon gasket

**Optics** Special design, clear, acrylic (PMMA) optic lens

**Glass** 4mm clear tempered glass

**LED** High-power LED with high efficacy

**Driver** Constant current driver with high efficiency

**Ambient Temperature**  
-40 °C/+50 °C

**Impact Resistance**


Glass : IK08

Body : IK10




ARL-G90 Ral 9005


Type Code	Power (w)	CCT (K)	Light Output (lm)	CRI	V/Hz	Weight (Kg)
BSTA. 550.105.40.L1	105	4000	15970	>70	220 - 240 / 50 - 60	8,5
BSTA. 550.105.40.L2	105	4000	15980	>70	220 - 240 / 50 - 60	8,5
BSTA. 550.105.40.L3	105	4000	16010	>70	220 - 240 / 50 - 60	8,5
BSTA. 550.105.40.L4	105	4000	15960	>70	220 - 240 / 50 - 60	8,5
BSTA. 550.140.40.L1	140	4000	19730	>70	220 - 240 / 50 - 60	9
BSTA. 550.140.40.L2	140	4000	19560	>70	220 - 240 / 50 - 60	9
BSTA. 550.140.40.L3	140	4000	19750	>70	220 - 240 / 50 - 60	9
BSTA. 550.140.40.L4	140	4000	19440	>70	220 - 240 / 50 - 60	9

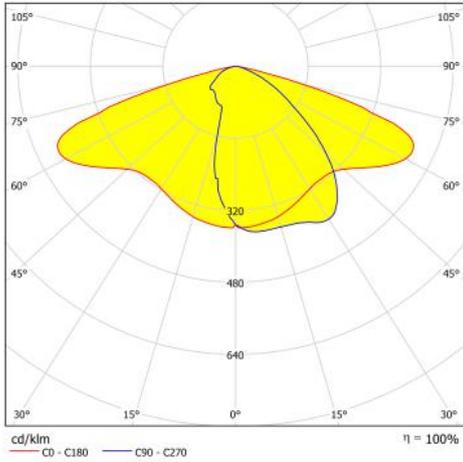


BSTA.550.140.40.L1

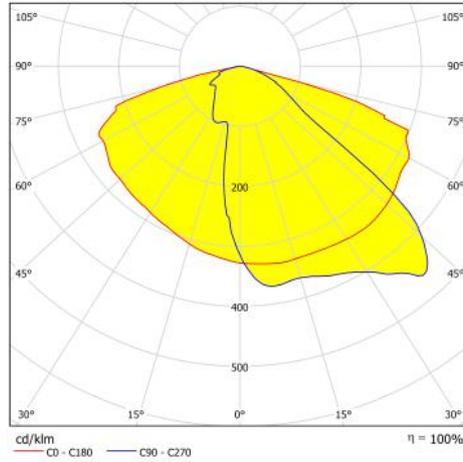

BSTA.550.140.40.L2

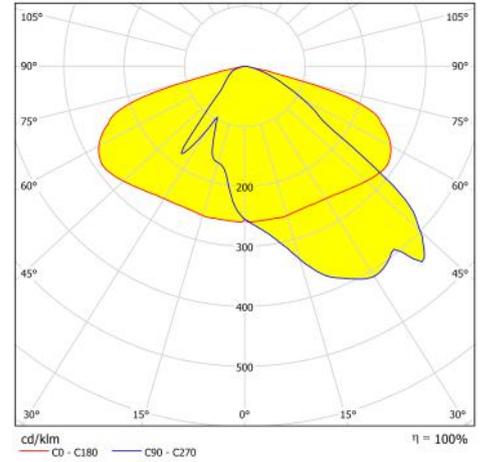

BSTA.550.140.40.L3

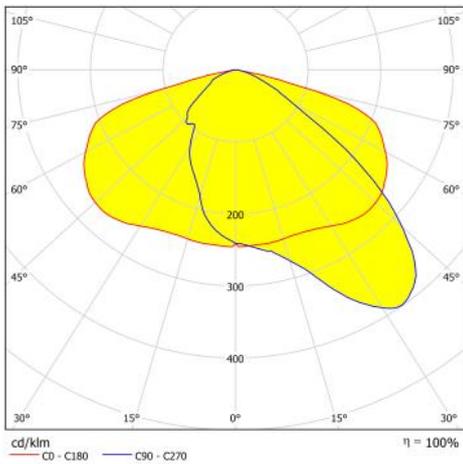

BSTA.550.140.40.L4

