90°/50° Optic Lens



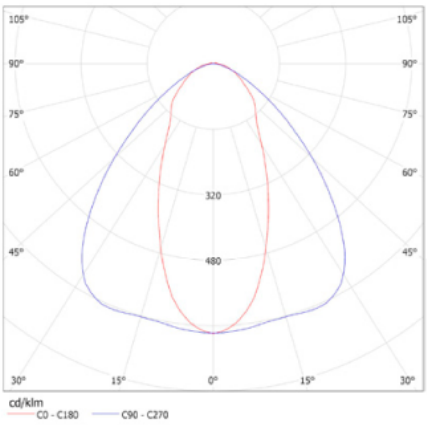
Housing
Aluminium extrusion profile and stainless steel mounting accessories with plastic end cap.

Optics
Optic lens or opal, white, diffusing polycarbonate lens with lambertian light distribution.

Led
High-efficacy mid power LED with CRI>80, achieving L90B50 ≥50.000 hours of lifetime.

Driver
Constant current output LED driver with high efficiency and Pf≥95.

Type Code	Power (w)	CCT (K)	Light Output (lm)	CRI	V/Hz	Weight (Kg)	Beam Angle
SUSKS.25W.30.90/50	25	3000	3830	>80	220 - 240 / 50 - 60	3,5	90°/50°
SUSKS.25W.40.90/50	25	4000	4020	>80	220 - 240 / 50 - 60	3,5	90°/50°
SUSKS.35W.30.90/50	35	3000	5400	>80	220 - 240 / 50 - 60	3,5	90°/50°
SUSKS.35W.40.90/50	35	4000	5640	>80	220 - 240 / 50 - 60	3,5	90°/50°
SUSKS.58W.30.90/50	58	3000	8640	>80	220 - 240 / 50 - 60	3,5	90°/50°
SUSKS.58W.40.90/50	58	4000	9180	>80	220 - 240 / 50 - 60	3,5	90°/50°


105°
105°
90°
90°
75°
75°
60°
60°
320
45°
480
45°
30°
15°
0°
15°
30°
cd/klm
C0 - C180
C90 - C270



