130° Opal Diffuser



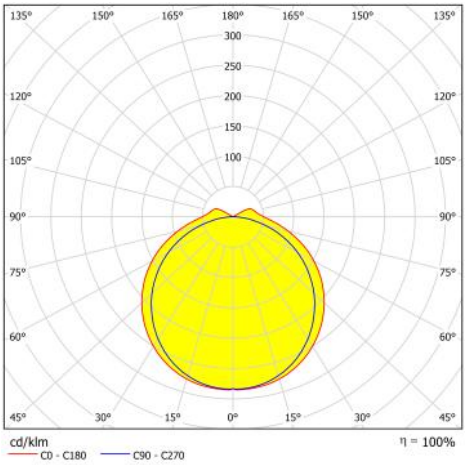
Housing
Aluminium extrusion profile and stainless steel mounting accessories with plastic end cap.


Optics
Optic lens or opal, white, diffusing polycarbonate lens with lambertian light distribution.

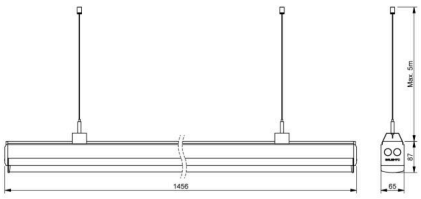
Led
High-efficacy mid power LED with CRI>80, achieving L90B50 ≥50.000 hours of lifetime.

Driver
Constant current output LED driver with high efficiency and Pf≥95.

Type Code	Power (w)	CCT (K)	Light Output (lm)	CRI	V/Hz	Weight (Kg)	Beam Angle
SOSKS.25W.30.130	25	3000	3050	>80	220 - 240 / 50 - 60	3,2	130°
SOSKS.25W.40.130	25	4000	3200	>80	220 - 240 / 50 - 60	3,2	130°
SOSKS.35W.30.130	35	3000	4380	>80	220 - 240 / 50 - 60	3,2	130°
SOSKS.35W.40.130	35	4000	4660	>80	220 - 240 / 50 - 60	3,2	130°
SOSKS.51W.30.130	51	3000	6530	>80	220 - 240 / 50 - 60	3,2	130°
SOSKS.51W.40.130	51	4000	6930	>80	220 - 240 / 50 - 60	3,2	130°


135°
150°
165°
180°
165°
150°
135°
300
250
200
150
100
120°
120°
105°
105°
90°
90°
75°
75°
60°
60°
45°
30°
15°
0°
15°
30°
45°
cd/klm
η = 100%
C0 - C180
C90 - C270




Max. 5m
1456
65