Stella Deboss / Opal



Housing
Aluminum extrusion profile and steel mounting accessories

Diffuser
Opal diffusing polycarbonate lens with lambertian light distribution

LED
High-efficacy mid power LED with CRI>80, achieving L90B50 ≥ 50,000 hours of lifetime

Driver
Constant current output LED driver with high efficiency and Pf≥0.90

Operating Temperature Range
0 °C/+35 °C

Option
Dimming via DALI

LL Low Lumen
ML Medium Lumen
HL High Lumen


*Matte natural anodized housing, finising G90 custom color.


Ral 9016 Ral 9005 *Andz.

Type Code	Power (w)	CCT (K)	Light Output (lm)	CRI	V/Hz	Cut-out Size (mm)	L (mm)	L1 (mm)	Lumen Variations
GSTD.871.12.40	12	4000	1120	80	220 - 240 / 50 - 60	860x60	871	857	LL
GSTD.871.12.30	12	3000	1060	80	220 - 240 / 50 - 60	860x60	871	857	LL
GSTD.871.23.40	23	4000	2250	80	220 - 240 / 50 - 60	860x60	871	857	ML
GSTD.871.23.30	23	3000	2140	80	220 - 240 / 50 - 60	860x60	871	857	ML
GSTD.871.37.40	37	4000	4030	80	220 - 240 / 50 - 60	860x60	871	857	HL
GSTD.871.37.30	37	3000	3830	80	220 - 240 / 50 - 60	860x60	871	857	HL
GSTD.1151.16.40	16	4000	1490	80	220 - 240 / 50 - 60	1140x60	1151	1137	LL
GSTD.1151.16.30	16	3000	1400	80	220 - 240 / 50 - 60	1140x60	1151	1137	LL
GSTD.1151.31.40	31	4000	2980	80	220 - 240 / 50 - 60	1140x60	1151	1137	ML
GSTD.1151.31.30	31	3000	2830	80	220 - 240 / 50	1140x60	1151	1137	ML

Type Code	Power (w)	CCT (K)	Light Output (lm)	CRI	V/Hz	Cut-out Size (mm)	L (mm)	L1 (mm)	Lumen Variations
GSTD.1151.31.30	31	3000	2830	80	- 60	1140x60	1151	1137	ML
GSTD.1151.51.40	51	4000	4900	80	220 - 240 / 50 - 60	1140x60	1151	1137	HL
GSTD.1151.51.30	51	3000	4650	80	220 - 240 / 50 - 60	1140x60	1151	1137	HL
GSTD.1431.19.40	19	4000	1870	80	220 - 240 / 50 - 60	1420x60	1431	1417	LL
GSTD.1431.19.30	19	3000	1760	80	220 - 240 / 50 - 60	1420x60	1431	1417	LL
GSTD.1431.35.40	35	4000	3750	80	220 - 240 / 50 - 60	1420x60	1431	1417	ML
GSTD.1431.35.30	35	3000	3560	80	220 - 240 / 50 - 60	1420x60	1431	1417	ML
GSTD.1431.64.40	64	4000	6700	80	220 - 240 / 50 - 60	1420x60	1431	1417	HL
GSTD.1431.64.30	64	3000	6370	80	220 - 240 / 50 - 60	1420x60	1431	1417	HL
GSTD.1711.23.40	23	4000	2240	80	220 - 240 / 50 - 60	1700x60	1711	1697	LL
GSTD.1711.23.30	23	3000	2110	80	220 - 240 / 50 - 60	1700x60	1711	1697	LL
GSTD.1711.43.40	43	4000	4470	80	220 - 240 / 50 - 60	1700x60	1711	1697	ML
GSTD.1711.43.30	43	3000	4240	80	220 - 240 / 50 - 60	1700x60	1711	1697	ML
GSTD.1711.77.40	77	4000	7350	80	220 - 240 / 50 - 60	1700x60	1711	1697	HL
GSTD.1711.77.30	77	3000	6980	80	220 - 240 / 50 - 60	1700x60	1711	1697	HL
GSTD.1991.28.40	28	4000	2460	80	220 - 240 / 50 - 60	1980x60	1991	1977	LL
GSTD.1991.28.30	28	3000	2460	80	220 - 240 / 50 - 60	1980x60	1991	1977	LL
GSTD.1991.53.40	53	4000	5230	80	220 - 240 / 50 - 60	1980x60	1991	1977	ML
GSTD.1991.53.30	53	3000	4970	80	220 - 240 / 50 - 60	1980x60	1991	1977	ML
GSTD.1991.87.40	87	4000	8600	80	220 - 240 / 50 - 60	1980x60	1991	1977	HL
GSTD.1991.87.30	87	3000	8170	80	220 - 240 / 50 - 60	1980x60	1991	1977	HL
GSTD.2271.32.40	32	4000	2990	80	220 - 240 / 50 - 60	2260x60	2271	2257	LL
GSTD.2271.32.30	32	3000	2840	80	220 - 240 / 50 - 60	2260x60	2271	2257	LL
GSTD.2271.68.40	68	4000	5960	80	220 - 240 / 50 - 60	2260x60	2271	2257	ML

Type Code	Power (w)	CCT (K)	Light Output (lm)	CRI	V/Hz	Cut-out Size (mm)	L (mm)	L1 (mm)	Lumen Variations
GSTD.2271.68.30	68	3000	5660	80	220 - 240 / 50 - 60	2260x60	2271	2257	ML
GSTD.2271.100.40	100	4000	9750	80	220 - 240 / 50 - 60	2260x60	2271	2257	HL
GSTD.2271.100.30	100	3000	9260	80	220 - 240 / 50 - 60	2260x60	2271	2257	HL
GSTD.2551.36.40	36	4000	3360	80	220 - 240 / 50 - 60	2540x60	2551	2537	LL
GSTD.2551.36.30	36	3000	3160	80	220 - 240 / 50 - 60	2540x60	2551	2537	LL
GSTD.2551.68.40	68	4000	6720	80	220 - 240 / 50 - 60	2540x60	2551	2537	ML
GSTD.2551.68.30	68	3000	6390	80	220 - 240 / 50 - 60	2540x60	2551	2537	ML
GSTD.2551.112.40	112	4000	11070	80	220 - 240 / 50 - 60	2540x60	2551	2537	HL
GSTD.2551.112.30	112	3000	10520	80	220 - 240 / 50 - 60	2540x60	2551	2537	HL
GSTD.2831.40.40	40	4000	3730	80	220 - 240 / 50 - 60	2820x60	2831	2817	LL
GSTD.2831.40.30	40	3000	3550	80	220 - 240 / 50 - 60	2820x60	2831	2817	LL
GSTD.2831.76.40	76	4000	7450	80	220 - 240 / 50 - 60	2820x60	2831	2817	ML
GSTD.2831.76.30	76	3000	7070	80	220 - 240 / 50 - 60	2820x60	2831	2817	ML
GSTD.2831.124.40	124	4000	11850	80	220 - 240 / 50 - 60	2820x60	2831	2817	HL
GSTD.2831.124.30	124	3000	11250	80	220 - 240 / 50 - 60	2820x60	2831	2817	HL

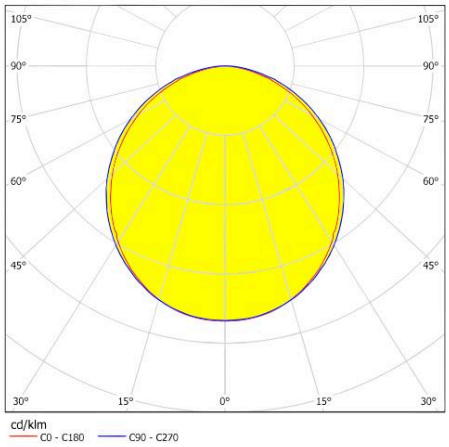


L1
72
L
58
130
Min. 10
Max. 45
55
69