Stella Duo-C / Opal



Housing
Aluminum extrusion profile and steel mounting accessories

Diffuser
Opal diffusing polycarbonate lens with lambertian light distribution

LED
High-efficacy mid power LED with CRI>80, achieving L90B50 ≥ 50,000 hours of lifetime

Driver
Constant current output LED driver with high efficiency and Pf≥0.90

Operating Temperature Range
0 °C/+35 °C

Option
Dimming via DALI

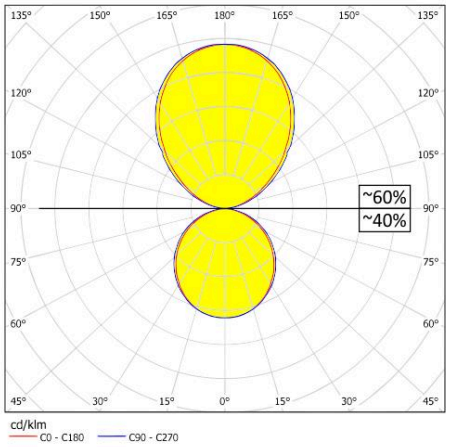
LL Low Lumen
HL High Lumen

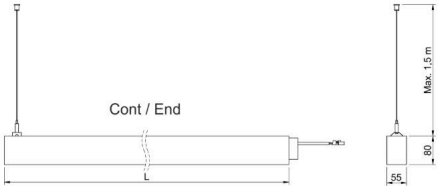
- Cont/End modules cannot be used as single. At least one piece Start module is required.
*Matte natural anodized housing.

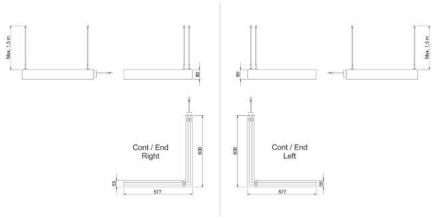
Ral 9016 Ral 9005 *Andz.

Type Code	Power (w)	CCT (K)	Light Output (lm)	CRI	V/Hz	L (mm)	Direct	Indirect	Lumen Variations
SCSTI.1401.49.40	49	4000	5570	80	220 - 240 / 50 - 60	1401	45%	55%	LL
SCSTI.1401.49.30	49	3000	5290	80	220 - 240 / 50 - 60	1401	45%	55%	LL
SCSTI.1401.65.40	65	4000	7730	80	220 - 240 / 50 - 60	1401	45%	55%	HL
SCSTI.1401.65.30	65	3000	7340	80	220 - 240 / 50 - 60	1401	45%	55%	HL
SCSTI.1681.56.40	56	4000	6680	80	220 - 240 / 50 - 60	1681	45%	55%	LL
SCSTI.1681.56.30	56	3000	6350	80	220 - 240 / 50 - 60	1681	45%	55%	LL
SCSTI.1681.78.40	78	4000	8970	80	220 - 240 / 50 - 60	1681	45%	55%	HL
SCSTI.1681.78.30	78	3000	8520	80	220 - 240 / 50 - 60	1681	45%	55%	HL
SCSTI.1961.70.40	70	4000	7790	80	220 - 240 / 50 - 60	1961	45%	55%	LL
SCSTI.1961.70.30	70	3000	7400	80	220 - 240 / 50 - 60	1961	45%	55%	LL
SCSTI.1961.95.40	95	4000	10520	80	220 - 240 / 50	1961	45%	55%	HL

Type Code	Power (w)	CCT (K)	Light Output (lm)	CRI	V/Hz	L (mm)	Direct	Indirect	Lumen Variations
SCSTI.1961.95.40	95	4000	10520	80	- 60	1961	45%	55%	HL
SCSTI.1961.95.30	95	3000	9990	80	220 - 240 / 50 - 60	1961	45%	55%	HL
SCSTI.2241.80.40	80	4000	8880	80	220 - 240 / 50 - 60	2241	45%	55%	LL
SCSTI.2241.80.30	80	3000	8440	80	220 - 240 / 50 - 60	2241	45%	55%	LL
SCSTI.2241.109.40	109	4000	11970	80	220 - 240 / 50 - 60	2241	45%	55%	HL
SCSTI.2241.109.30	109	3000	11370	80	220 - 240 / 50 - 60	2241	45%	55%	HL
SCSTI.2521.90.40	90	4000	10010	80	220 - 240 / 50 - 60	2521	45%	55%	LL
SCSTI.2521.90.30	90	3000	9510	80	220 - 240 / 50 - 60	2521	45%	55%	LL
SCSTI.2521.122.40	122	4000	13510	80	220 - 240 / 50 - 60	2521	45%	55%	HL
SCSTI.2521.122.30	122	3000	12840	80	220 - 240 / 50 - 60	2521	45%	55%	HL
SCSTI.2801.100.40	100	4000	11100	80	220 - 240 / 50 - 60	2801	45%	55%	LL
SCSTI.2801.100.30	100	3000	10550	80	220 - 240 / 50 - 60	2801	45%	55%	LL
SCSTI.2801.136.40	136	4000	14950	80	220 - 240 / 50 - 60	2801	45%	55%	HL
SCSTI.2801.136.30	136	3000	14210	80	220 - 240 / 50 - 60	2801	45%	55%	HL
STRSTI.6058.40.40	40	4000	4340	80	220 - 240 / 50 - 60		45%	55%	LL
STRSTI.6058.40.30	100	3000	4130	80	220 - 240 / 50 - 60		45%	55%	LL
STRSTI.6058.54.40	54	4000	6000	80	220 - 240 / 50 - 60		45%	55%	HL
STRSTI.6058.54.30	54	4000	5700	80	220 - 240 / 50 - 60		45%	55%	HL
STLSTI.6058.40.40	40	4000	4340	80	220 - 240 / 50 - 60		45%	55%	LL
STLSTI.6058.40.30	100	3000	4130	80	220 - 240 / 50 - 60		45%	55%	LL
STLSTI.6058.54.40	54	4000	6000	80	220 - 240 / 50 - 60		45%	55%	HL
STLSTI.6058.54.30	54	4000	5700	80	220 - 240 / 50 - 60		45%	55%	HL


135°
150°
165°
180°
165°
150°
135°
120°
120°
105°
105°
90°
90°
75°
75°
60°
60°
45°
30°
15°
0°
15°
30°
45°
~60%
~40%
cd/klm
C0 - C180
C90 - C270


Cont / End
L
Max. 1.5 m
80
55


Cont / End
Right
Cont / End
Left