Stella Duo-C / Micro



Housing
Aluminum extrusion profile and steel mounting accessories

Diffuser
Microprismatic diffuser providing homogeneous light distribution

LED
High-efficacy mid power LED with CRI>80, achieving L90B50 ≥ 50,000 hours of lifetime

Driver
Constant current output LED driver with high efficiency and Pf≥0.90

Operating Temperature Range
0 °C/+35 °C

Option
Dimming via DALI

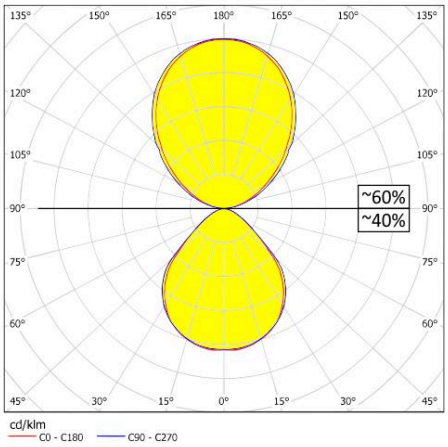
LL Low Lumen - Low UGR
HL High Lumen - Low UGR

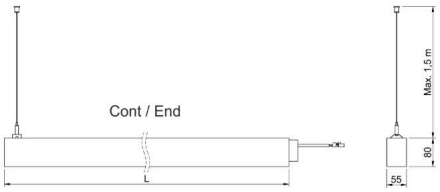
- Cont/End modules cannot be used as single. At least one piece Start module is required.
*Matte natural anodized housing.

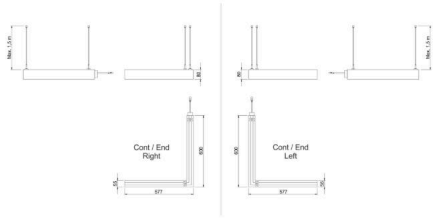
Ral 9016 Ral 9005 *Andz.

Type Code	Power (w)	CCT (K)	Light Output (lm)	CRI	V/Hz	L (mm)	Direct	Indirect	Lumen Variations
SCSMI.1401.49.40	49	4000	5250	80	220 - 240 / 50 - 60	1401	45%	55%	LL
SCSMI.1401.49.30	49	3000	4940	80	220 - 240 / 50 - 60	1401	45%	55%	LL
SCSMI.1401.65.40	65	4000	7290	80	220 - 240 / 50 - 60	1401	45%	55%	HL
SCSMI.1401.65.30	65	3000	6890	80	220 - 240 / 50 - 60	1401	45%	55%	HL
SCSMI.1681.56.40	56	4000	6280	80	220 - 240 / 50 - 60	1681	45%	55%	LL
SCSMI.1681.56.30	56	3000	5930	80	220 - 240 / 50 - 60	1681	45%	55%	LL
SCSMI.1681.78.40	78	4000	8470	80	220 - 240 / 50 - 60	1681	45%	55%	HL
SCSMI.1681.78.30	78	3000	8040	80	220 - 240 / 50 - 60	1681	45%	55%	HL
SCSMI.1961.70.40	70	4000	7350	80	220 - 240 / 50 - 60	1961	45%	55%	LL
SCSMI.1961.70.30	70	3000	7400	80	220 - 240 / 50 - 60	1961	45%	55%	LL
SCSMI.1961.95.40	95	4000	6980	80	220 - 240 / 50	1961	45%	55%	HL

Type Code	Power (w)	CCT (K)	Light Output (lm)	CRI	V/Hz	L (mm)	Direct	Indirect	Lumen Variations
SCSMI.1961.95.40	95	4000	6980	80	- 60	1961	45%	55%	HL
SCSMI.1961.95.30	95	3000	9430	80	220 - 240 / 50 - 60	1961	45%	55%	HL
SCSMI.2241.80.40	80	4000	8380	80	220 - 240 / 50 - 60	2241	45%	55%	LL
SCSMI.2241.80.30	80	3000	7960	80	220 - 240 / 50 - 60	2241	45%	55%	LL
SCSMI. 2241.109.40	109	4000	11290	80	220 - 240 / 50 - 60	2241	45%	55%	HL
SCSMI. 2241.109.30	109	3000	10730	80	220 - 240 / 50 - 60	2241	45%	55%	HL
SCSMI.2521.90.40	90	4000	9440	80	220 - 240 / 50 - 60	2521	45%	55%	LL
SCSMI.2521.90.30	90	3000	8500	80	220 - 240 / 50 - 60	2521	45%	55%	LL
SCSMI. 2521.122.40	122	4000	12750	80	220 - 240 / 50 - 60	2521	45%	55%	HL
SCSMI. 2521.122.30	122	3000	12110	80	220 - 240 / 50 - 60	2521	45%	55%	HL
SCSMI. 2801.100.40	100	4000	10470	80	220 - 240 / 50 - 60	2801	40%	60%	LL
SCSMI. 2801.100.30	100	3000	9950	80	220 - 240 / 50 - 60	2801	40%	60%	LL
SCSMI. 2801.136.40	136	4000	14110	80	220 - 240 / 50 - 60	2801	40%	60%	HL
SCSMI. 2801.136.30	136	3000	13400	80	220 - 240 / 50 - 60	2801	40%	60%	HL
STRSMI. 6058.40.40	40	4000	4080	80	220 - 240 / 50 - 60		45%	55%	LL
STRSMI. 6058.40.30	100	3000	3920	80	220 - 240 / 50 - 60		45%	55%	LL
STRSMI. 6058.54.40	54	4000	5640	80	220 - 240 / 50 - 60		45%	55%	HL
STRSMI. 6058.54.30	54	4000	5360	80	220 - 240 / 50 - 60		40%	60%	HL
STLSMI. 6058.40.40	40	4000	4080	80	220 - 240 / 50 - 60		40%	60%	LL
STLSMI. 6058.40.30	100	3000	3920	80	220 - 240 / 50 - 60		40%	60%	LL
STLSMI. 6058.54.40	54	4000	5640	80	220 - 240 / 50 - 60		40%	60%	HL
STLSMI. 6058.54.30	54	4000	5360	80	220 - 240 / 50 - 60		40%	60%	HL


135° 150° 165° 180° 165° 150° 135°
120° 120°
105° 105°
90° 90°
75° 75°
60° 60°
45° 30° 15° 0° 15° 30° 45°
~60%
~40%
cd/klm
C0 - C180
C90 - C270


Cont / End
L
Max. 1.5 m
80
55


Cont / End
Right
Cont / End
Left