



# Stella Deboss-C / Opal



## Housing

Aluminum extrusion profile and steel mounting accessories

## Diffuser

Opal diffusing polycarbonate lens with lambertian light distribution

## LED

High-efficacy mid power LED with CRI>80, achieving L90B50 ≥ 50,000 hours of lifetime

## Driver

Constant current output LED driver with high efficiency and Pf≥0.90

## Operating Temperature Range

0 °C/+35 °C

## Option

Dimming via DALI

**LL** Low Lumen

**ML** Medium Lumen

**HL** High Lumen

- Cont/End modules cannot be used as single. At least one piece Start module is required.

\*Matte natural anodized housing.




Ral 9016 Ral 9005 \*Andz.

Type Code	Power (w)	CCT (K)	Light Output (lm)	CRI	V/Hz	Cut-out Size (mm)	L (mm)	Lumen Variations
GCSTD.1121.16.40	16	4000	1490	80	220 - 240 / 50 - 60	1121x60	1121	LL
GCSTD.1121.16.30	16	3000	1400	80	220 - 240 / 50 - 60	1121x60	1121	LL
GCSTD.1121.31.40	31	4000	2980	80	220 - 240 / 50 - 60	1121x60	1121	ML
GCSTD.1121.31.30	31	3000	2830	80	220 - 240 / 50 - 60	1121x60	1121	ML
GCSTD.1121.51.40	51	4000	4900	80	220 - 240 / 50 - 60	1121x60	1121	HL
GCSTD.1121.51.30	51	3000	4650	80	220 - 240 / 50 - 60	1121x60	1121	HL
GCSTD.1401.19.40	19	4000	1870	80	220 - 240 / 50 - 60	1401x60	1401	LL
GCSTD.1401.19.30	19	3000	1760	80	220 - 240 / 50 - 60	1401x60	1401	LL
GCSTD.1401.35.40	35	4000	3750	80	220 - 240 / 50 - 60	1401x60	1401	ML

Type Code	Power (w)	CCT (K)	Light Output (lm)	CRI	V/Hz	Cut-out Size (mm)	L (mm)	Lumen Variations
GCSTD.1401.35.30	35	3000	3560	80	220 - 240 / 50 - 60	1401x60	1401	ML
GCSTD.1401.64.40	64	4000	5770	80	220 - 240 / 50 - 60	1401x60	1401	HL
GCSTD.1401.64.30	64	3000	5480	80	220 - 240 / 50 - 60	1401x60	1401	HL
GCSTD.1681.23.40	23	4000	2240	80	220 - 240 / 50 - 60	1681x60	1681	LL
GCSTD.1681.23.30	23	3000	2110	80	220 - 240 / 50 - 60	1681x60	1681	LL
GCSTD.1681.43.40	43	4000	4470	80	220 - 240 / 50 - 60	1681x60	1681	ML
GCSTD.1681.43.30	43	3000	4240	80	220 - 240 / 50 - 60	1681x60	1681	ML
GCSTD.1681.77.40	77	4000	7350	80	220 - 240 / 50 - 60	1681x60	1681	HL
GCSTD.1681.77.30	77	3000	6980	80	220 - 240 / 50 - 60	1681x60	1681	HL
GCSTD.1961.28.40	28	4000	2620	80	220 - 240 / 50 - 60	1961x60	1961	LL
GCSTD.1961.28.30	28	3000	2460	80	220 - 240 / 50 - 60	1961x60	1961	LL
GCSTD.1961.53.40	53	4000	5230	80	220 - 240 / 50 - 60	1961x60	1961	ML
GCSTD.1961.53.30	53	3000	4970	80	220 - 240 / 50 - 60	1961x60	1961	ML
GCSTD.1961.87.40	87	4000	8600	80	220 - 240 / 50 - 60	1961x60	1961	HL
GCSTD.1961.87.30	87	3000	8170	80	220 - 240 / 50 - 60	1961x60	1961	HL
GCSTD.2241.32.40	32	4000	2990	80	220 - 240 / 50 - 60	2241x60	2241	LL
GCSTD.2241.32.30	32	3000	2840	80	220 - 240 / 50 - 60	2241x60	2241	LL
GCSTD.2241.61.40	61	4000	5660	80	220 - 240 / 50 - 60	2241x60	2241	ML
GCSTD.2241.61.30	61	3000	5660	80	220 - 240 / 50 - 60	2241x60	2241	ML
GCSTD.2241.100.40	100	4000	9200	80	220 - 240 / 50 - 60	2241x60	2241	HL
GCSTD.2241.100.30	100	3000	8740	80	220 - 240 / 50 - 60	2241x60	2241	HL
GCSTD.2521.36.40	36	4000	3360	80	220 - 240 / 50 - 60	2521x60	2521	LL
GCSTD.2521.36.30	36	3000	3160	80	220 - 240 / 50 - 60	2521x60	2521	LL
GCSTD.2521.68.40	68	4000	6720	80	220 - 240 / 50 - 60	2521x60	2521	ML

Type Code	Power (w)	CCT (K)	Light Output (lm)	CRI	V/Hz	Cut-out Size (mm)	L (mm)	Lumen Variations
GCSTD.2521.68.40	68	4000	6720	80	60	2521x60	2521	ML
GCSTD.2521.68.30	68	3000	6390	80	220 - 240 / 50 - 60	2521x60	2521	ML
GCSTD.2521.112.40	112	4000	11070	80	220 - 240 / 50 - 60	2521x60	2521	HL
GCSTD.2521.112.30	112	3000	10520	80	220 - 240 / 50 - 60	2521x60	2521	HL
GCSTD.2801.40.40	40	4000	3730	80	220 - 240 / 50 - 60	2801x60	2801	LL
GCSTD.2801.40.30	40	3000	3550	80	220 - 240 / 50 - 60	2801x60	2801	LL
GCSTD.2801.76.40	76	4000	7450	80	220 - 240 / 50 - 60	2801x60	2801	ML
GCSTD.2801.76.30	76	3000	7070	80	220 - 240 / 50 - 60	2801x60	2801	ML
GCSTD.2801.124.40	124	4000	11850	80	220 - 240 / 50 - 60	2801x60	2801	HL
GCSTD.2801.124.30	124	3000	11250	80	220 - 240 / 50 - 60	2801x60	2801	HL
GTRSTD.6158.16.40	16	4000	1490	80	220 - 240 / 50 - 60			LL
GTRSTD.6158.16.30	16	3000	1400	80	220 - 240 / 50 - 60			LL
GTRSTD.6158.31.40	31	4000	2980	80	220 - 240 / 50 - 60			ML
GTRSTD.6158.31.30	31	4000	2830	80	220 - 240 / 50 - 60			ML
GTRSTD.6158.51.40	51	4000	4900	80	220 - 240 / 50 - 60			HL
GTRSTD.6158.51.30	51	3000	4650	80	220 - 240 / 50 - 60			HL
GTLSTD.6158.16.40	16	4000	1490	80	220 - 240 / 50 - 60			LL
GTLSTD.6158.16.30	16	3000	1400	80	220 - 240 / 50 - 60			LL
GTLSTD.6158.31.40	31	4000	2670	80	220 - 240 / 50 - 60			ML
GTLSTD.6158.31.30	31	4000	2450	80	220 - 240 / 50 - 60			ML
GTLSTD.6158.51.40	51	4000	4430	80	220 - 240 / 50 - 60			HL
GTLSTD.6158.51.30	51	3000	4070	80	220 - 240 / 50 - 60			HL

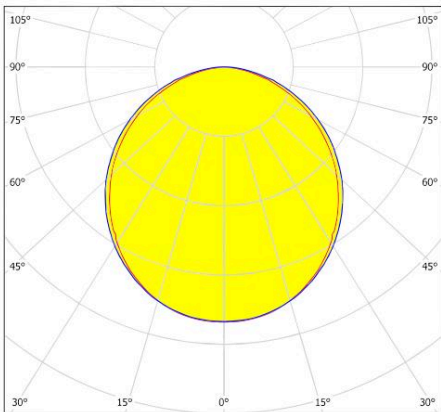

cd/klm  
 — C0 - C180 — C90 - C270

